


CL Series Clamp-On Chainwheels

The 'CL' Series allows for safe and controlled access to valves that are in awkward or difficult situations. They can be installed in minutes and are an easy and inexpensive way of ensuring both employee safety and effective valve operation.

- Ductile iron clamp-on chain sprocket fits hand wheel sizes from 51 to 660 mm (2 to 26") in diameter
- All units come complete with sprocket wheel, chain guide, set collar, zinc plated hardware and installation instructions
- Available in stainless steel and galvanised options

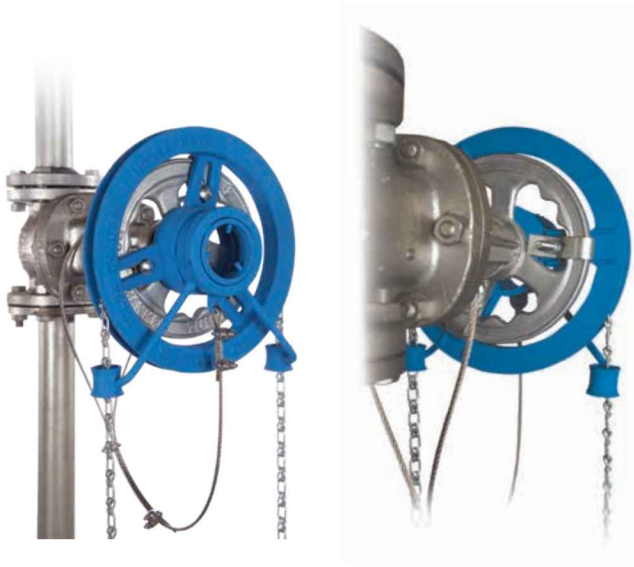

CL-Series – Clamp-On Chainwheel

Model No.	For Use With Valve Handwheel Diameter in (mm)	Weight lbs (kg)	Chain & Roto Link Size	Additional Chain Needed for Loop ft. (mm)	Chain Weight Per ft. lbs (kg)	RCK Safety Kit Size
CL4	2-4 (50-102)	2 (0.91)	#2	1 (305)	0.10 (0.05)	RCK ³ / ₁₆
CL6	4 1/2 - 5 3/4 (108-146)	6 (2.72)	#2	1 (305)	0.10 (0.05)	RCK ³ / ₁₆
CL7.5	6-7 1/2 (152-190)	7 (3.17)	1/0	2 (610)	0.17 (0.08)	RCK ³ / ₁₆
CL9	7 3/4 - 9 (197-229)	9 (4.08)	1/0	2 (610)	0.17 (0.08)	RCK ³ / ₁₆
CL12	9 1/4 - 12 1/2 (235-318)	15 (6.80)	1/0	3 (914)	0.17 (0.08)	RCK ³ / ₁₆
CL15	12 3/4 - 15 1/2 (324-394)	21 (9.52)	4/0	4 (1,219)	0.31 (0.14)	RCK ³ / ₁₆
CL18	15 3/4 - 19 (400-483)	28 (12.70)	4/0	4 (1,219)	0.31 (0.14)	RCK ¹ / ₄
CL21	19 1/4 - 22 (489-559)	38 (17.24)	5/0	5 (1,524)	0.35 (0.16)	RCK ¹ / ₄
CL24	22 1/4 - 26 (565-660)	49 (22.22)	5/0	6 (1,829)	0.35 (0.16)	RCK ¹ / ₄